




DOOR INTERLOCK MODULE

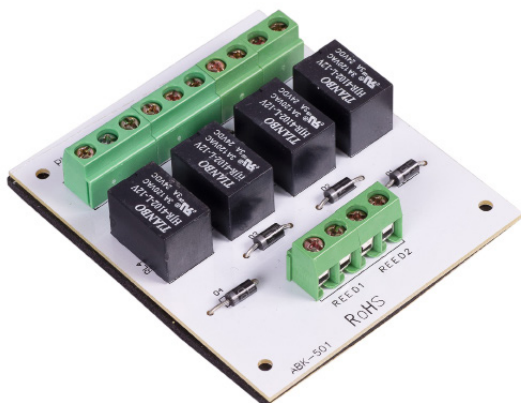

DLIM


| SPECIFICATION | FEATURES | OTHER PRODUCTS |
|---------------|----------|----------------|
|---------------|----------|----------------|

DLIM

- Two separate inputs/outputs
- Lock outputs are voltage free contacts 5@24V
- Requires 12V supply
- Relay contacts rated: 3A @ 125VAC or 12VDC
- Input voltage: 10-15VDC
- Operating temperature: -20 to +70°C
- Operating humidity: 0-85 / non-condensing

DLIM

- Separate outputs lock door 1 and 2
- Separate push to exit inputs door 1 and 2
- To control two doors for interlocking
- Requires 1 door to be closed in order for the second door to open



| DIMENSIONS | CONTENTS |
|------------|----------|
|------------|----------|

DLIM

- 70x60 (mm)
- 44g (Unboxed)

DLIM

